



### MECHANICAL DATA

#### Dimensions

- ◆ Height: 401 mm
- ◆ Width: 251 mm
- ◆ Depth: 109,5 mm

#### IP Rating



- ◆ IP54

#### Housing Material

- ◆ Housing: PC/ABS, black
- ◆ Cover Ring: ABS, Chrome plated

### ELECTRICAL DATA

Charging standard	IEC 61851-1, Mode 3
Input Voltage	1+3-phase (230V) and 3-phase (400V) / 50 Hz
Max. Input Current	16A and 32A
Max. Output Power	1,38 kW to 22kW Adjustable 6-32A (2 amps steps) Dynamic charging and load balancing
Output Connection	Type 2 socket, tethered cable type 1 or type 2
Operation Temperature	-25°C to +40°C
Humidity	Max. 95%
Electrical Protections	AC 30mA, DC-RCM 6mA
Status Indication	LED screen with text
Authorization	Auto start
Weight	3,0 kg
Marking	CE
Mounting	Wall mount
kWh- meter	Optional
Options	Stainless steel pole (single or double), Key switch

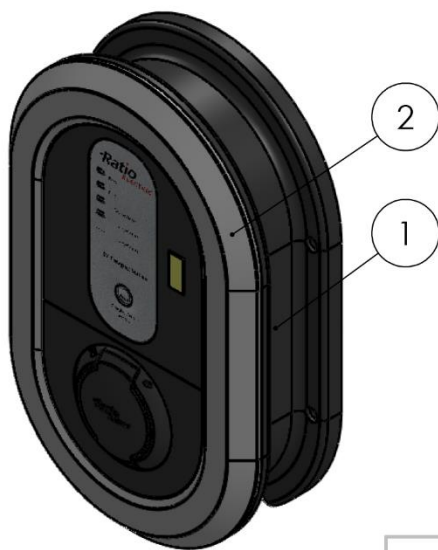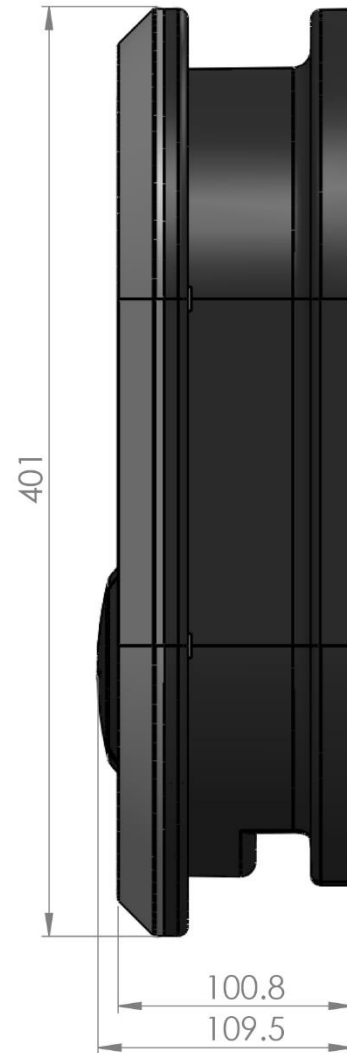

Part nr.	Description	Material
1	Housing	PC/ABS
2	Front Cover	ABS Chrome Plated

EV charge station
Type 2 outlet
Date: 15-07-2015

**Ratio**  
ELECTRIC

[www.ratio-electric.com](http://www.ratio-electric.com)





Part nr.	Description	Material
1	Housing	PC/ABS
2	Front Cover	ABS Chrome Plated

EV Charge Station
Fixed cable, Type 2 outlet
Date: 15-07-2015

**Ratio**  
ELECTRIC

[www.ratio-electric.com](http://www.ratio-electric.com)

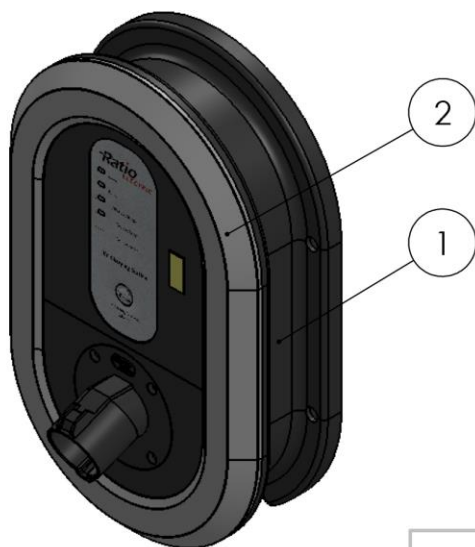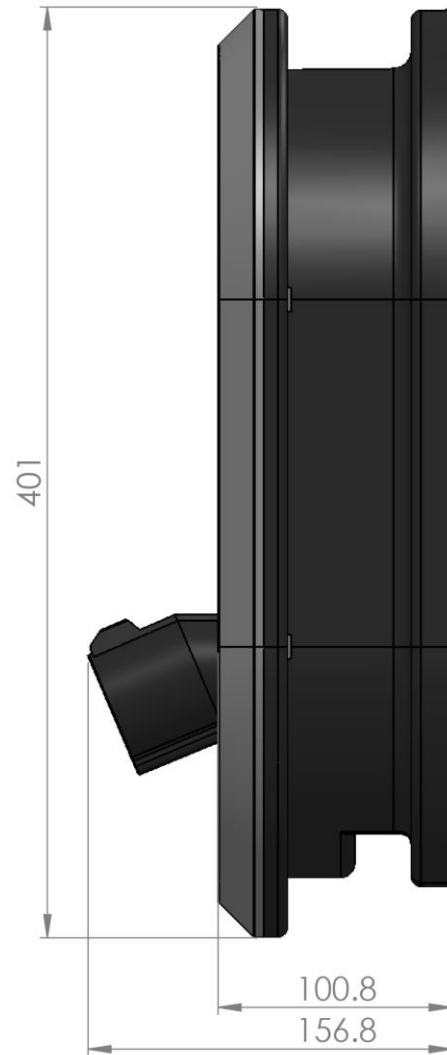

Part nr.	Description	Material
1	Housing	PC/ABS
2	Front Cover	ABS Chrome Plated

EV charge station
Fixed cable, type 1 connector
Date: 15-07-2015

**Ratio**  
ELECTRIC

[www.ratio-electric.com](http://www.ratio-electric.com)